



Item No. _____

Project _____

Quantity _____

Electric, Full-Size, Stacked/Std Depth Convection Ovens

Model: ECOF-T2

Strato Series



Model ECOF-T2 shown

PAN CAPACITY GUIDE [Per Oven/Total]

Pan Type	Rack Positions	Optimum
18" X 26" Full-Sheet	10 or 11/oven	5/10
12" X 20" Hotel*	-	10/20

* 2-1/2" deep pans

SHORT/BID SPECIFICATION

Convection Oven shall be a LANG Manufacturing Model ECOF-T2 Control Package, an 11.66-kW electric heated 5-pan full-size unit, with: simultaneous-opening heavy duty doors; stainless steel exterior, aluminized steel back and porcelainized steel cooking compartment; powerful rear mounted blower with two speed motor; compartment inspection light and five pan racks standard; plus a "lifetime" warranty on doors. Includes all the features listed and options/accessories checked.

STANDARD PRODUCT WARRANTY

- Two year, parts & labor, plus
- Lifetime warranty on oven doors

CONSTRUCTION FEATURES

- Heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- Aluminized steel back
- Cooking compartments are porcelainized steel
- 2" insulation on six sides of cooking compartments
- Heavy duty, simultaneously-opening compartment doors, with large double pane tempered glass windows
- Powerful blower centered in back of each compartment
- Compartment inspection lighting standard
- Chrome steel 10 or 11 position rack slides with five chrome plated wire racks provided for each oven
- Choice of [Specify one]:
 - 6" adjustable legs [standard] or
 - 6" heavy duty casters

PERFORMANCE FEATURES

- 150 to 450°F operating temperature range
- Temperature control accurate to ± 5°F average
- Two speed fan
- Door interlock switch cuts power to fan

CONTROL PACKAGE

- Accu-Stat Control**
 - Simple knob-set time and temperature controls
 - 1-hour timer with non-stop buzzer
 - HIGH-LOW speed fan switch
 - Power-ON and inspection light switches




Sheet No. LSP-SSE2 (rev. 1/12)

INSTALLATION REQUIREMENTS

- [Ⓔ] Two site changeable dual voltage: 208V/240V, 1- or 3-Phase; or optional 480V, 3-phase electrical connections
- Installation under approved vent hood may be required. Contact local codes. [Power connection from rear. See below]

OPTIONS & ACCESSORIES

- 480 Volt, 3-phase models [no charge]
- 6" heavy duty casters no-cost option
- 3" stainless steel spacer
- Solid stainless steel doors, in lieu of doors with windows
- Extra wire pan racks [5 provided as std. in each oven]

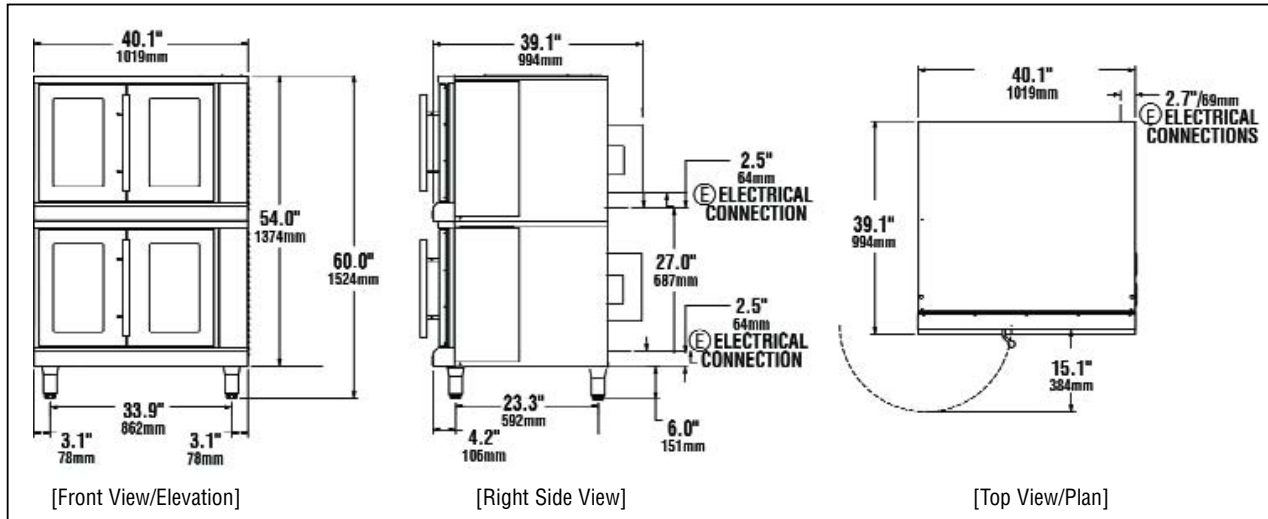

Model	Height x Width x Depth (with standard legs)	Clearance from combustible surface	Weight		Freight Class
			Actual	Shipping	
ECOF-2	60.0" x 40.1" x 39.1" 1524mm x 1019mm x 994mm	Sides: 6" (153mm) Back: 6" (153mm) Floor: 6" (153mm)	780 lbs. 355 kg	860 lbs. 391 kg	70

Model	[Ⓔ] Total Electrical Requirements [Via two connections]			
	Voltage	Total kW	Phase	Amps/Line
ECOF-2	208V/60Hz	23.3	1	112.1
	240V/60Hz	23.3	1	97.2
	480V/60Hz	23.3	1	48.6
	208V/60Hz	23.3	3	74.2
	240V/60Hz	23.3	3	57.7
	480V/60Hz	23.3	3	32.2

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-SSE2 (rev. 1/12)

LANG MANUFACTURING • 10 SUNNEN DR. ST. LOUIS, MO 63143
PHONE: 314-678-6315 • FAX: 314-781-3636 • www.langworld.com